

Model 960



Features

- Low Profile - 1.55"
- Thru-Bore or Hollow Bore Styles
- Industrial Grade, Heavy Duty Housing
- State-of-the-Art Opto-ASIC Circuitry


The single-turn Model 960 Absolute Series Accu-Coder™ provides an unique solution to a wide variety of industrial applications requiring absolute position information. By providing a low profile package of just 1.55", a variety of hollow and thru-bore sizes, and an easy to use flexible mounting system, the Model 960 goes where traditional absolute encoders do not fit. In addition, its innovative Opto-ASIC circuitry, coupled with its digital output, make it an excellent choice in those applications plagued by an unusually high level of electrical noise. The Model 960 can easily be mounted directly on a motor shaft, bringing the advantage of absolute positioning in an all metal housing while eliminating the fixtures, couplers, and adapters required by other absolute encoder designs.

Common Applications

Machine Tools, Robotics, Telescopes, Antennas, Rotary & X-Y Positioning Tables, Medical Scanners

Model 960 Ordering Guide

Blue type indicates price adder options. Not all configuration combinations may be available. Contact Customer Service for details.

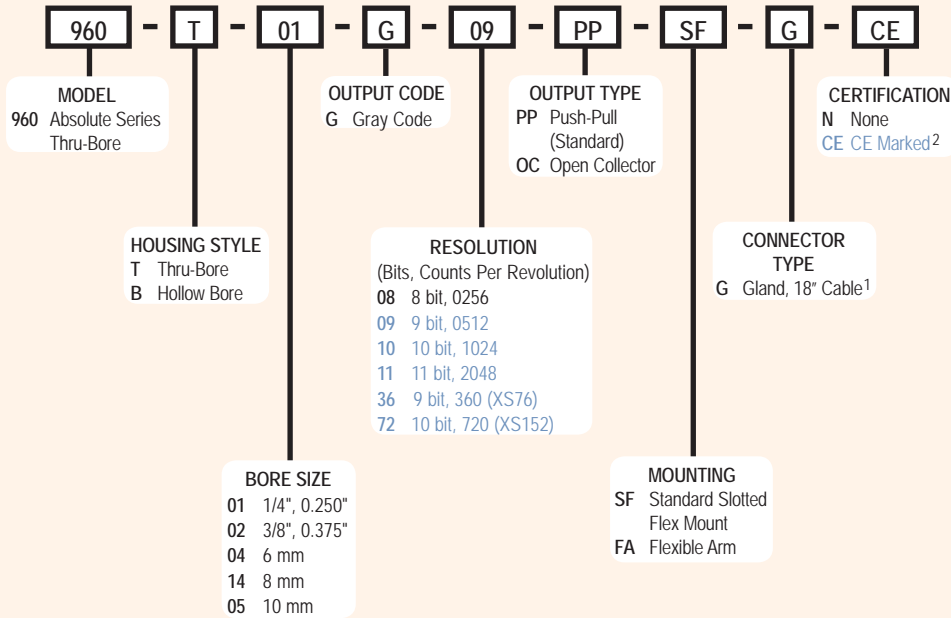

For specification assistance call
Customer Service at
1-800-894-0412

NOTES:

- 1 For non-standard cable lengths, add a forward slash (/) plus cable length expressed in feet. Example: G/6 = 6 feet of cable.
- 2 Please refer to Technical Bulletin TB100: *When to Choose the CE Option* at www.encoder.com.

Model 960

Model 960 Specifications

Electrical

Input Voltage.....4.75 to 26 VDC max
 Regulation.....100 mV peak-to-peak, max ripple at 0 to100 kHz
 Input Current.....100 mA max with no output load
 Output FormatAbsolute- Parallel Outputs
 Output Type.....Open Collector- 20 mA max per channel
 Push-Pull- 20 mA max per channel
 Code.....Gray Code, Excess Gray Code
 Max Frequency.....25.6 kHz (LSB)
 Rise Time.....Less than 1 microsecond
 Resolution.....up to 11 bit
 Accuracy.....±1/2 LSB

Control

Directional Control...Field selectable for increasing counts (CW or CCW). Standard configuration user selects the applicable MSB wire for direction of count. Direction control option allows user to select count direction by applying 0 VDC to an encoder input. See *Absolute Series Wiring Tables* below.


Mechanical

Max. Shaft Speed.....6000 RPM continuous
 Bore Size.....0.250", 0.375", 6 mm, 8 mm, 10 mm
 Bore Tolerance.....-0.0000" / +0.0006"
 User Shaft Tolerances
 Radial Runout.....0.007"
 Axial Endplay.....±0.030"
 Starting Torque.....0.3 oz-in typical for thru-bore
 0.14 oz-in typical for hollow bore
 Max Acceleration.....1 x 10⁵ rad/sec²
 Electrical Conn.....Gland with 18" cable (braid shield, 30 AWG conductors)
 Housing.....Aluminum with non-corrosive finish
 Mounting.....Slotted Flex Mount standard, Flex-Mount Arm optional
 Weight.....7 oz typical


Environmental

Operating Temp.....0° to 70° C
 Storage Temp.....-20° to +85° C
 Humidity.....98% RH non-condensing
 Vibration.....10 g @ 58 to 500 Hz
 Shock.....20 g @ 11 ms duration

Model 960 Slotted Flex Mount (SF)

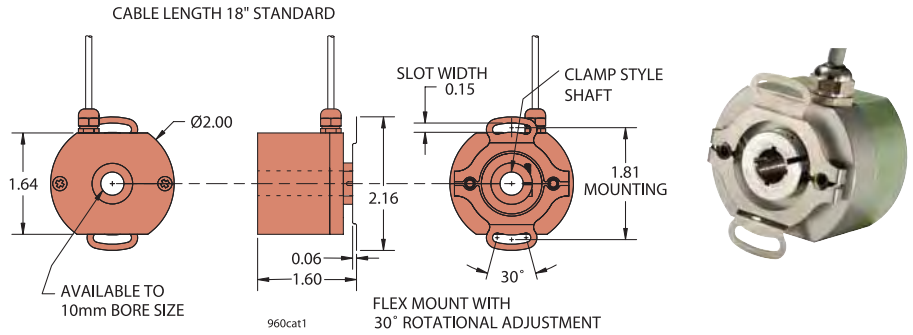

Model 960 With Flex Arm (FA)

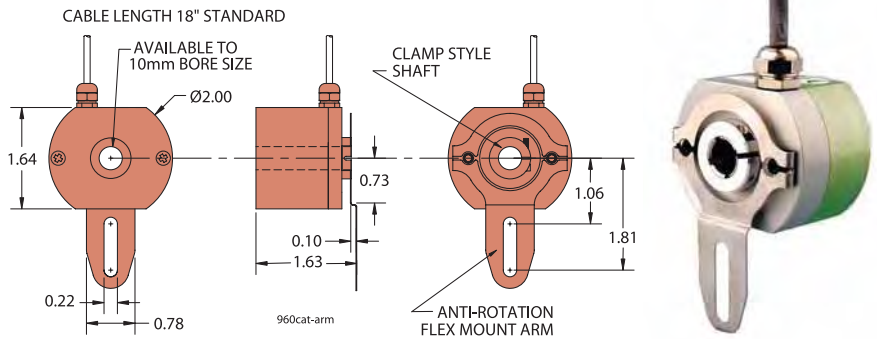

All dimensions are in inches with a tolerance of ±0.005" or ±0.01" unless otherwise specified

Wiring Table

Function	Gland Cable Wire Color	NOTES:
Common	Black	* CE Option Only **Standard is CW increasing count (when viewed from shaft end, and using brown wire for MSB). Direction Control is pulled up internally to 5 VDC. To reverse count direction, Direction Control must be pulled low (0 VDC). If 5 VDC is applied to Direction Control, unit remains in standard CW increasing count mode. Count direction can also be reversed by using the Yellow MSB wire instead of the Brown. At no time should voltage applied to Direction Control exceed 5 VDC.
+VDC	Red	
S1 cw MSB	Brown	
S1 ccw MSB	Yellow	
S2	White	
S3	Green	
S4	Orange	
S5	Blue	
S6	Violet	
S7	Gray	
S8 LSB 8-bit	Pink	
S9 LSB 9-bit	Red/Green	
S10 LSB 10-bit	Red/Yellow	
S11 LSB 11-bit	Turquoise	
Direction Control**	Red/Blue	
Case Ground*	Shield	