

# Model TR3 - Heavy Duty Tru-Trac™



## Features

- Heavy Duty Encoder And Measuring Wheel Solution Integrated Into One Industrial Strength Unit
- Spring Loaded Torsion Arm Makes Wheel Pressure Adjustments A Snap
- Easily Installed In A Vertical, Horizontal, or Upside-Down Orientation
- Operates Over A Variety Of Surfaces At Speeds Up To 3000 Feet Per Minute
- Integrated Module Simplifies Your System Design, Reducing Cost


EPC does it again! The NEW TR3 Heavy Duty Tru-Trac™ by Encoder Products Company is an integrated heavy duty encoder and spring loaded measuring wheel assembly all in one, easy-to-use, compact unit. Available in a single, or optional dual-wheel format, the TR3 Heavy Duty Tru-Trac™ is a versatile solution for tracking velocity, position or distance over a wide variety of surfaces in almost any industrial application. Its spring loaded torsion arm provides a simple-to-adjust torsion load, allowing the TR3 Heavy Duty Tru-Trac™ to be mounted in any orientation, even upside-down. The TR3 Heavy Duty Tru-Trac™ housing is an all metal work horse, specifically designed to take on your toughest application environments at operating speeds up to 3000 feet per minute. Just one look and it's easy to see the TR3 Heavy Duty Tru-Trac™ is the ideal solution for countless applications.

## Common Applications

Lumber, Corrugated, Converting, Metal Roll Forming, Paper Monitoring, Glue Dispensing, Linear Material Monitoring, Conveyor Systems, Printing, Labeling, Mining, Construction

## Model TR3 - Heavy Duty Tru-Trac™ Ordering Guide

Blue type indicates price adder options. Not all configuration combinations may be available. Contact Customer Service for details.

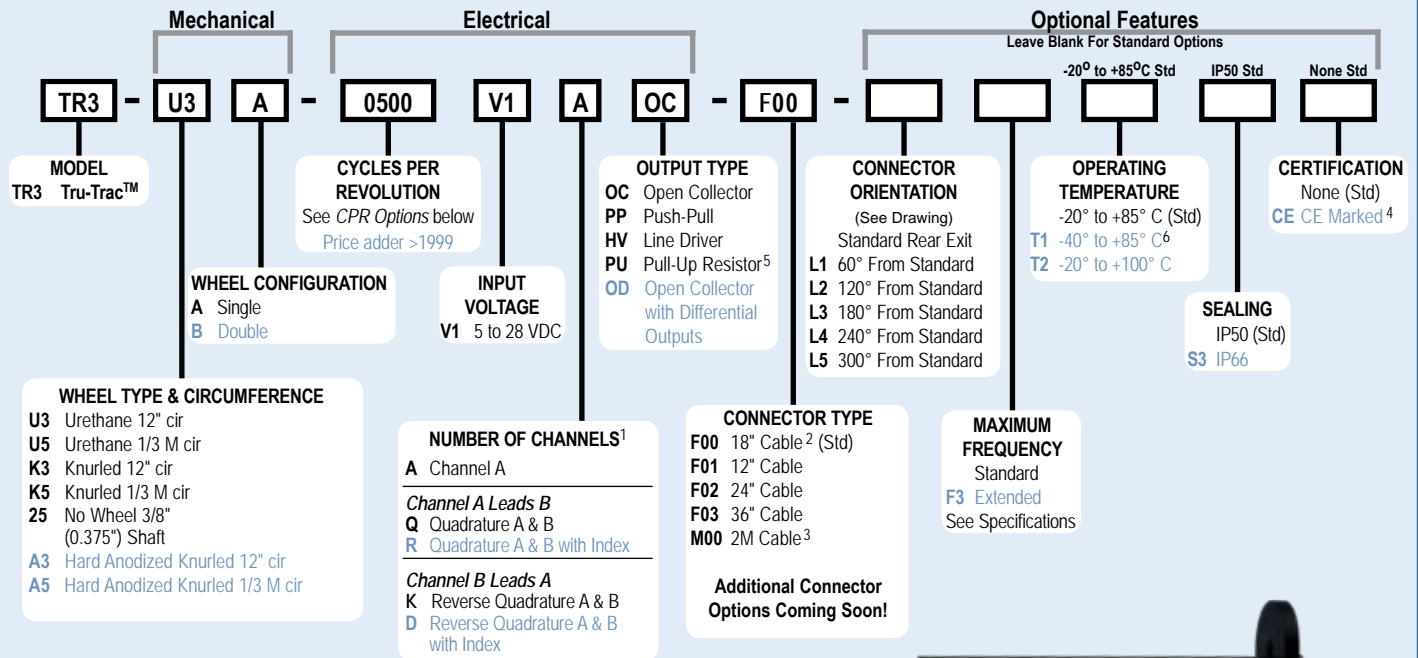

### Model TR3 - Tru-Trac™ CPR Options

0001 thru 0189*	0198	0200	0250
0256	0300	0315	0400
0500	0512	0580	0750
0800	1000	1024	1125
1250	1500	1800	2048
2500	2540	3000	4000
4096	5000	6000	7200
10,000			8192

\*Contact Customer Service For Availability

New CPR values are periodically added to those listed. Contact Customer Service to determine all currently available values. Special disk resolutions are available upon request and may be subject to a one-time NRE fee.

For specification assistance call  
Customer Service at  
1-800-894-0412

### NOTES:

- 1 Contact Customer Service for non-standard index gating or phase relationship options.
- 2 For non-standard English cable lengths enter 'F' plus cable length expressed in feet. Example: F06 = 6 feet of cable. Frequency above 300 kHz standard cable lengths only.
- 3 For non-standard metric cable lengths enter 'M' plus cable length expressed in meters. Example: M06 = 6 meters of cable.
- 4 Please refer to **Technical Bulletin TB100: When to Choose the CE Option** at [www.encoder.com](http://www.encoder.com).
- 5 With Input Voltage above 16 VDC, operating temperature is limited to 85° C.
- 6 Rated to -40° C during encoder operation. Storage and startup below -25° C not recommended.

Optional Accessory Mounting Bracket (Stock #176389-01) for TR3 Heavy Duty Tru-Trac™ can be ordered separately.



# Model TR3 - Heavy Duty Tru-Trac™

## Model TR3 Tru-Trac™ Specifications

### Electrical

- Input Voltage..... 4.75 to 28 VDC max for temperatures up to 85° C  
4.75 to 24 VDC for temperatures between 85° C to 100° C
- Input Current..... 100 mA max (65 mA typical) with no output load
- Output Format..... Incremental- Two square waves in quadrature with channel A leading B for clockwise shaft rotation, as viewed from the wheel side. See *Waveform Diagrams* below.
- Output Types..... Open Collector- 20 mA max per channel  
Push-Pull- 20 mA max per channel  
Pull-Up- Open collector with 2.2K ohm Pull-Up  
20mA max per channel  
Line Driver- 20 mA max per channel (Meets RS 422 at 5 VDC supply)
- Index ..... Once per revolution.  
0190 to 10,000 CPR: Gated to output A  
0001 to 0189 CPR: Ungated  
See *Waveform Diagrams* below.
- Max. Frequency ..... Standard Frequency Response is 200 kHz for CPR 1 to 2540  
500 kHz for CPR 2541 to 5000  
1 MHz for CPR 5001 to 10,000  
Extended Frequency Response (optional) is 300 kHz for CPR 2000, 2048, 2500, and 2540
- Noise Immunity ..... Tested to BS EN61000-6-2; BS EN50081-2; BS EN61000-4-2; BS EN61000-4-3; BS EN61000-4-6, BS EN500811
- Symmetry ..... 180° (±18°) electrical
- Quad. Phasing ..... 90° (±22.5°) electrical
- Min. Edge Sep ..... 67.5° electrical
- Accuracy ..... Within 0.017° mechanical or 1 arc-minute from true position. (for CPR>189)


### Mechanical

- Max Linear Speed... 3000 FPM not to exceed a maximum shaft speed of 6000 RPM.
- Shaft Material ..... Stainless Steel
- Shaft Size.....  $\varnothing 0.375"$
- Radial Shaft Load .. Up to 10 lb max. Controlled by spring torsion feature
- Starting Torque..... 1.0 oz-in typical with IP50 seal  
2.5 oz-in typical with IP66 seal and single wheel  
4.0 oz-in typical with IP66 seal and dual wheel
- Electrical Conn..... 18" cable (foil and braid shield, 24 AWG conductors)
- Mounting ..... 5/8" diameter thru hole with clamp
- Housing ..... Powder coated aluminum
- Wheel Width..... 3/4" standard
- Weight ..... 2.5 lb typical with single wheel  
3.0 lb typical with dual wheel


### Environmental

- Operating Temp..... -20° to +85° C for standard models  
-40° to +85° C for low temperature option  
-20° to +100° C for high temperature option
- Storage Temp..... -25° to +85° C
- Humidity ..... 98% RH non-condensing
- Vibration..... 10 g @ 58 to 500 Hz
- Shock ..... 80 g @ 11 ms duration
- Sealing ..... IP50 standard; IP66 available


## Model TR3 - Heavy Duty Tru-Trac™

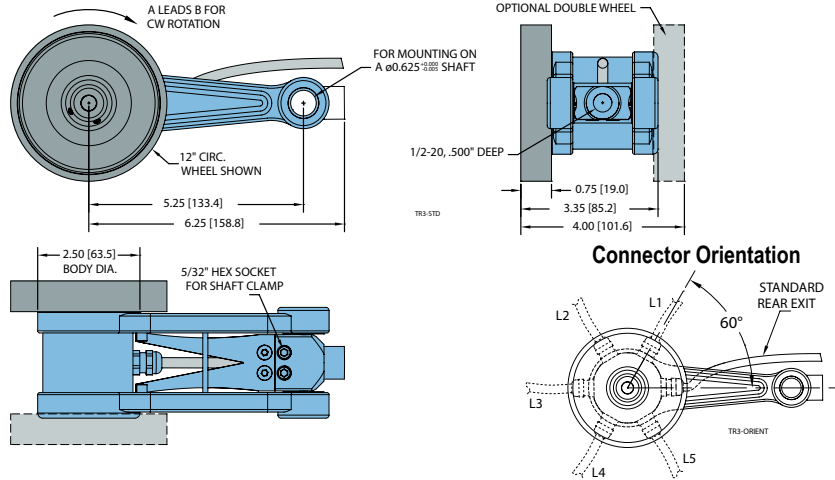


## Model TR3 Mounting Bracket (Order #176389-01)

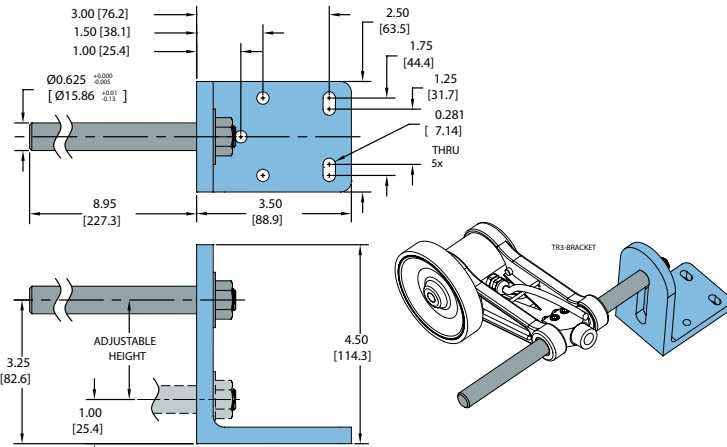

## Model TR3 Double Wheel Pivot (Order #176391-01)

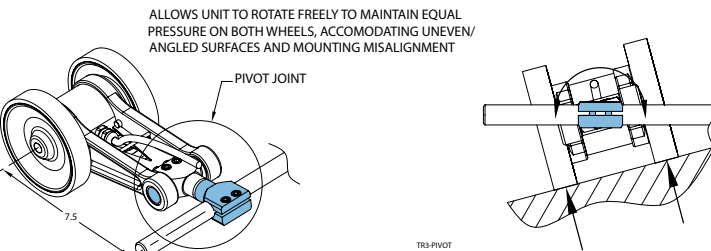

### Waveform Diagram

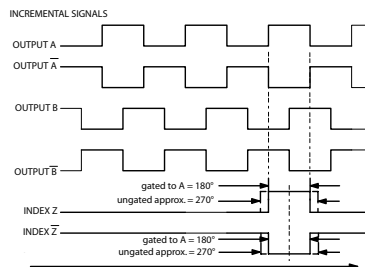

Clockwise rotation as viewed from the single wheel side.  
Note: All degree references are electrical degrees.  
Waveform shown with optional complementary signals A, B, Z for HV and OD outputs only.

### Wiring Table

Function	Cable Wire Color
Com	Black
+VDC	White
A	Brown
A'	Yellow
B	Red
B'	Green
Z	Orange
Z'	Blue
Shield	Bare *

\* CE Option: Cable Shield (bare wire) is connected to internal case.