


## LONG DISTANCE SENSORS

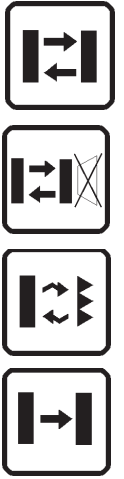

- *Enhanced emission and special lenses ideal for long operating distances*
- *µP Teach-in setting for background suppression*
- *Orientable M12 connector*
- *Impermeable, compact and resistant plastic housing*

## S20 SERIES

The **S20** series offers all the basic optic functions at the highest operating distances. The series presents models with 50 cm background suppression with microprocessor-based Teach-in setting or, with trimmer adjustment, 10 m polarised retroreflex, 2 m diffuse proximity and 50 m emitter-receiver optic functions.


Even with particularly compact dimensions, these sensors guarantee optimal performances, thanks to special aspherical lenses that take full advantage of the high-power LED emission, visible red in the background suppression and polarised retroreflex versions and infrared in all the other models.

Both NO and NC outputs are present in the NPN or PNP versions. M12 connection is available.

The connection block can be adjusted either in a straight or right angle position, in order to offer improved mounting versatility.







## TECHNICAL DATA

<b>Power supply:</b> .....	10 ... 30 Vdc, reverse polarity protection
<b>Consumption:</b> .....	50 mA max.
<b>Light emission:</b> .....	red LED 660 nm (B, M vers.) infrared LED 880 nm (C, F/G vers.)
<b>Diffuse proximity operating distance:</b> .....	1... 200 cm
<b>Background suppression op. distance:</b> .....	10 ... 50 cm
<b>Polarised retroreflex operating distance:</b> ..	0.1 ... 7 m (on R2)
<b>Through beam operating distance:</b> .....	0.1 ... 50 m
<b>Setting:</b> .....	sensitivity trimmer (B, C, F vers.) SET push-button (M vers.)
<b>Indicators:</b> .....	yellow OUTPUT LED green STABILITY LED (B, C, F vers.) green READY LED (M vers.) red ALARM LED (M vers.)
<b>Output type:</b> .....	NO-NC NPN or PNP, open collector
<b>Saturation voltage:</b> .....	1 V max. (NPN vers.) 2 V max. (PNP vers.)
<b>Output current:</b> .....	200 mA max., short-circuit protection
<b>Response time:</b> .....	1 ms max.
<b>Switching frequency:</b> .....	500 Hz max.
<b>Connection:</b> .....	4-pole M12 connector
<b>Electrical protection:</b> .....	class 2
<b>Mechanical protection:</b> .....	IP66
<b>Housing material:</b> .....	ABS
<b>Lens material:</b> .....	PMMA plastic
<b>Weight:</b> .....	50 g max.
<b>Operating temperature:</b> .....	-25 ... +55°C -10 ... +55°C (M vers.)
<b>Storage temperature:</b> .....	-25 ... +70°C
<b>Reference standard:</b> .....	EN 60947-5-2
<b>Certifications:</b> .....	CE 


The operating distances indicate the detection distance with excess gain 2.

## DETECTION DIAGRAMS

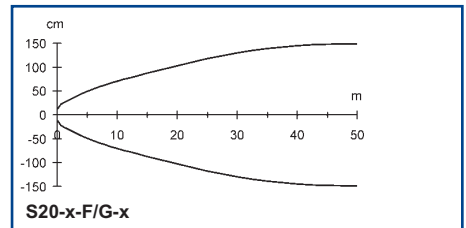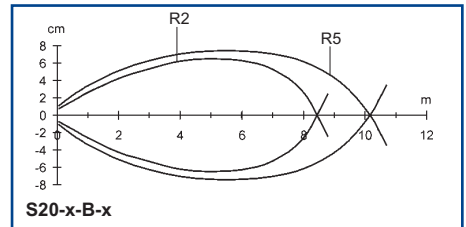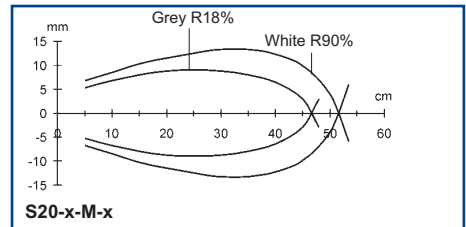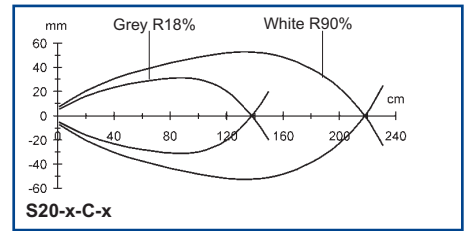


The detection diagrams indicate the typical operating distance with excess gain 1.

## CONNECTIONS

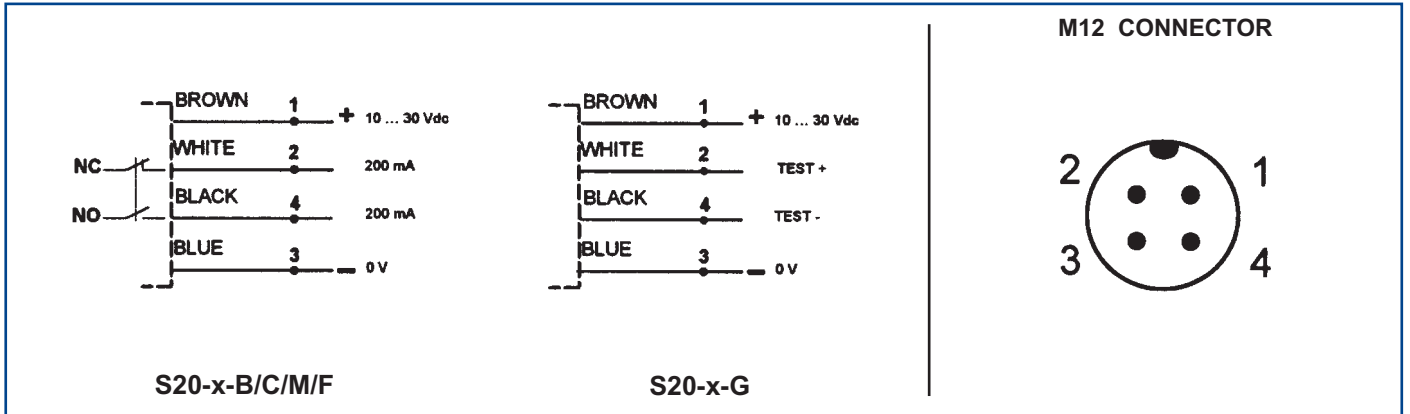

## DIMENSIONS

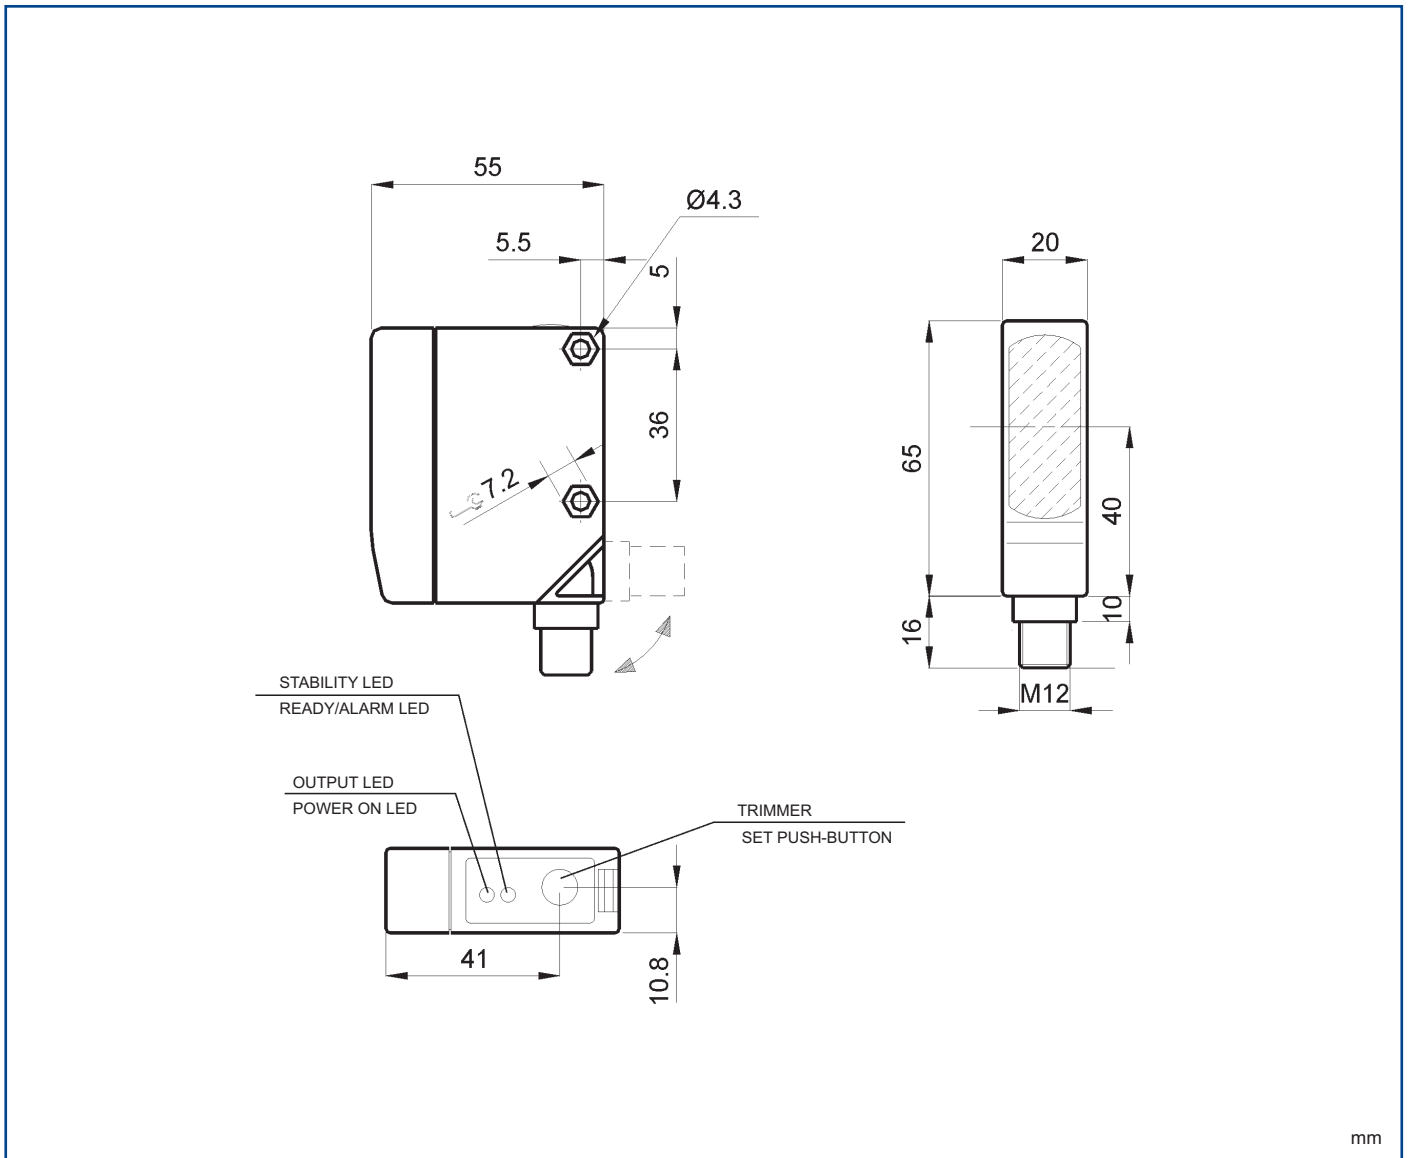



## MODEL SELECTION AND ORDER INFORMATION

MODEL	OPTIC FUNCTION	CONNECTION	OUTPUT	CODE N°
S20-5-C-P	diffuse proximity	M12 connector	PNP	951351110
S20-5-C-N	diffuse proximity	M12 connector	NPN	951351160
S20-5-M-P	background suppression	M12 connector	PNP	951351120
S20-5-M-N	background suppression	M12 connector	NPN	951351170
S20-5-B-P	polarised retroreflex	M12 connector	PNP	951351100
S20-5-B-N	polarised retroreflex	M12 connector	NPN	951351150
S20-5-F-P	receiver	M12 connector	PNP	951351130
S20-5-F-N	receiver	M12 connector	NPN	951351180
S20-5-G	emitter	M12 connector	-	951351140

## ACCESSORY SELECTION AND ORDER INFORMATION

MODEL	DESCRIPTION	CODE N°
ST-164	1 pc fixing bracket	95ACC1340

*Please refer alsto to **Sensor Accessories***

UNIVERSAL MAXI SENSORS