

Class H & K Fuse Panels


30 and 60 Amp-250 Volt



Specifications:


- Base, General Purpose Phenolic, 150°C
- Patented Cool-Clip® Design
- Clip, Copper Alloy, Tin Plated
- Reinforcing Member Available
- Bus Bars are Available with #2/0 - #14 AWG or 250 kcmil - #6 Wire Ranges
- Consult Factory for Special Requirements
- UL Recognized File No. IZLT2.E35113
- CSA Certified File No. LR21455
- CE

Ordering Code:

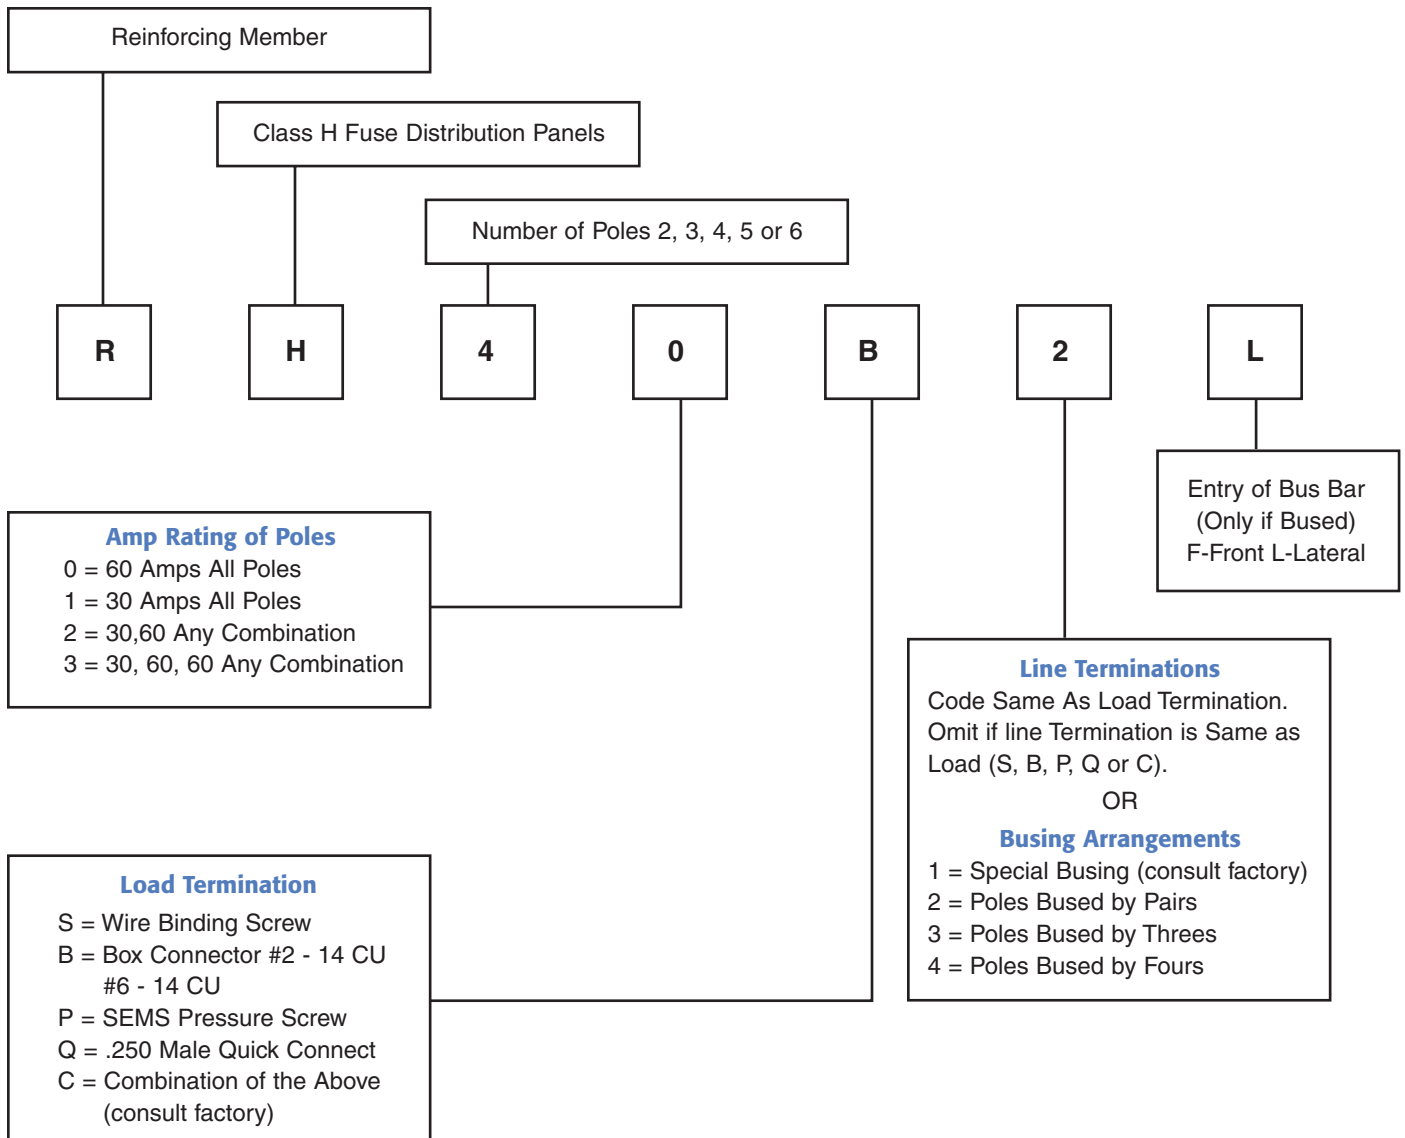

Class H & K Fuse Panels (Cont.)

30 and 60 Amp-250 Volt

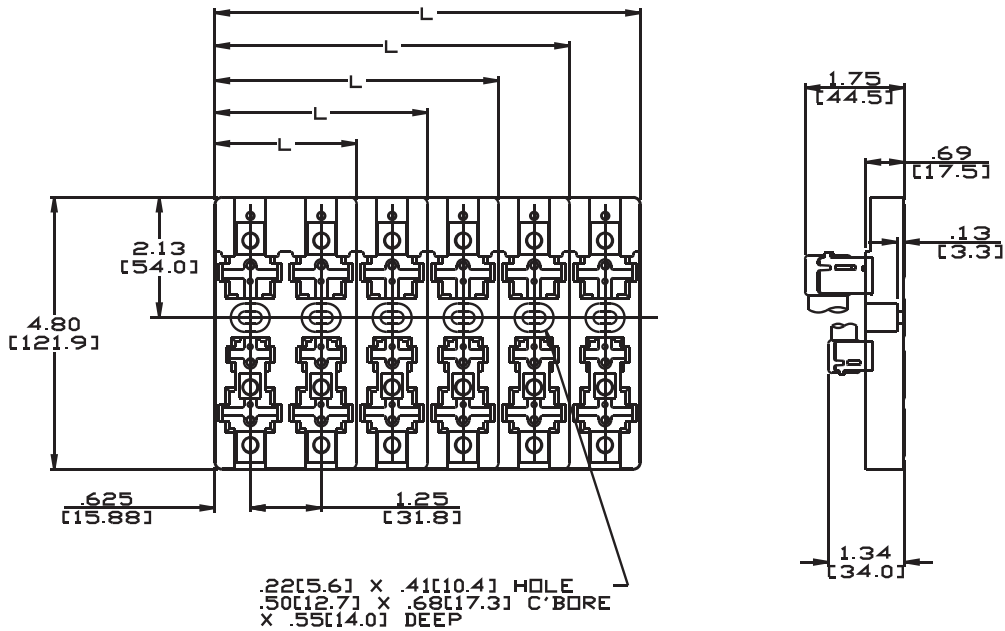

Poles No.	Dimensions (IN)		(MM)		Poles No.	Dimensions (IN)		(MM)	
	L					L			
2	2.50		63.5		5	6.25		158.8	
3	3.75		95.25		6	7.50		190.5	
4	5.00		127.0						

Fuse Distribution Panel Options

Circle/Indicate one item per pole and number of poles. The items to be indicated are within the rectangles.

Bussing is only available on line side. If bussing, indicate lug size 2/0 or 250 kcmil (F = Front entry, L = Lateral entry)

Consult factory for other modifications.

