

# DIN Rail Terminal Blocks

## MIK16

### 10 mm - 600 Volts AC/DC


#### Specifications:

- Insulating Material, Nylon 6/6, Gray
- Wire Range #6-#22 AWG – 65 Amps
- UL Recognized File No. XCFR2.E62806
- CSA Certified File No. LR700930- 68 Amps
- VDE – 82 Amps
- **CE**
- RoHS Compliant



MIK16

Catalog #	Description
MIK16	Center Section
MN35-2	DIN Rail symmetrical 35 X 7.5 mm slotted 2 m long / steel zinc-plated
MVB16-2	Jumper 2-position
MVB16-12	Jumper 12-position
MVBL16	Removable connecting jumpers for the connection of adjacent lines
MVL16-2	Connecting straps for linking together two adjacent 12 pole jumpers
MIW16	Insulating end sections for covering and insulating the last terminal in an assembly
MIW50	Insulating partition walls for visual and electrical separation of terminal groups
MKAW16	Safety covers with warning label for line terminals which cannot be disconnected
MSK35	End bracket used on both ends of the assembly to hold blocks in place

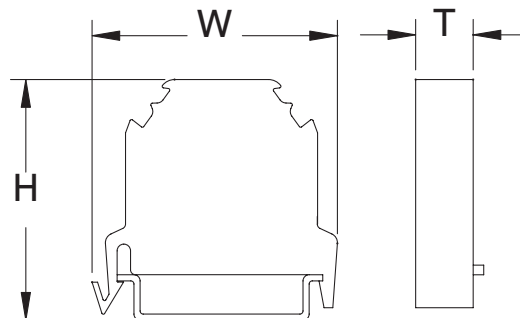

Dimensions:  
H = 44 mm (1.732")  
W = 42 mm (1.653")  
T = 10 mm (.394")