

# Midget Enclosed Fuse Holders - 600 Volt<sup>+</sup>

## Specifications:

- Tested and Approved for 100,000 RMS Symmetrical Amps Withstand Rating and Short Circuit Current Ratings (SCCR)
- Touchsafe Design IEC Type IP20
- DIN Rail Mount (35mm)
- Blown Fuse Indication Available
- Handle Allows Quick Easy Fuse Change
- AC & DC Rated
- Indication light AC and DC - 80 Volts Minimum
- UL Recognized File No. IZLT2.E35113
- CSA Certified File No. LR21455
- **CE**
- RoHS Compliant




6SM30A1-B shown with fuse (fuse not included)

6SM30A1-B (non-indicating)

6SM30A3I-B (indicating)

Catalog #	Indicating	Poles	Amps	Base Materials	Wire Range	Fuse Size	Fuses
6SM30A1-B	No	1	30	Thermoplastic	#6-#14 AWG CU	13/32" DIA BY 1 1/2"	A13X-2, A25Z-2,
6SM30A2-B		2					A60Q-2, A6Y-2B, AGU,
6SM30A3-B		3					ATM, ATQ, BAF, BAN,
6SM30A4-B		4					BLF, BLN, BLS, FLA,
6SM30A1I-B	Yes	1	30	Thermoplastic	#6-#14 AWG CU	13/32" DIA BY 1 1/2"	FLM, FLQ, FNM, FNQ,
6SM30A2I-B		2					GFN, GGO, KLK,
6SM30A3I-B		3					KLKD, KLQ, KTK,
6SM30A4I-B		4					OTM, TRM

Dimensions	mm	Inches
A	17.8	0.70
B	35.6	1.40
C	53.3	2.10
D	71.1	2.80
E	43.2	1.70
F	59.7	2.35
G	12.2	0.48
H	77.2	3.04

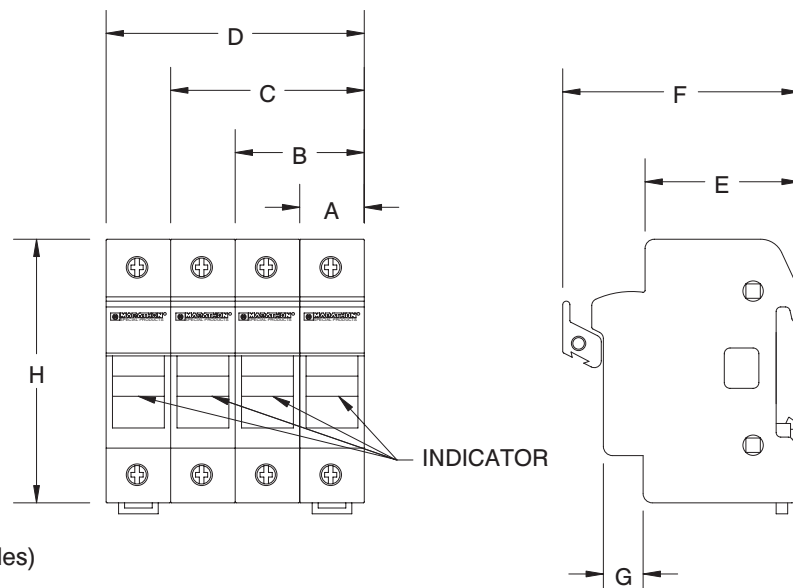

Pin Kit (used for ganging multiple poles)

Catalog Description:  
**EFH-MCCK**

- \*Includes 10 handle pins and 20 body clips
- \*Use one handle pin and two body clips per pole