


# Power Stud to Distribution Blocks

## 600 Volts AC/DC Up to 1000 Volts AC/DC (CE)<sup>+</sup>

### Specifications:

- Connector, High Conductive Aluminum, Tin Plated, Rated for Copper and Aluminum Wire
- Stud, Brass, Tin Plated, Metric (M) Studs, Steel - intended for wires terminated with crimp lugs
- Amp Rating Based on NEC Table 310-16 Using 75°C Copper Wire
- UL Recognized File No. XCFR2.E62806
- CSA Certified File No. LR19766
- CE
- Flexible Stranded Wire Compliant
- RoHS Compliant

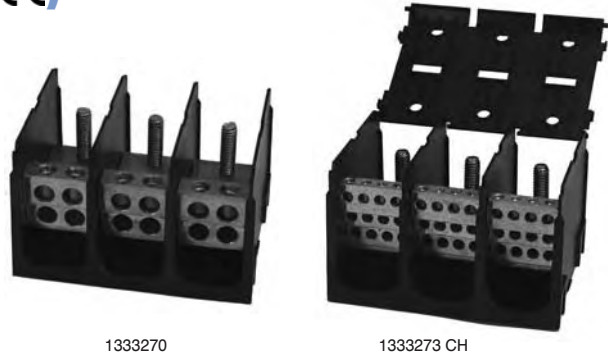

\*\* Openings rated for #4-14 AWG are multiple wire rated:  
(2) #10 CU Str, (2 to 4) #12 CU Str, and (2 to 4) #14 CU Str.

\*\*\* Openings rated for #2-14 AWG are multiple wire rated:  
(2) #8 CU Str, (2) #10 CU Str, (2) #12 CU Str, and (2) #14 CU Str.

Replace "X" with # of poles

Catalog #	Hinge Cover	Poles (X)	Amps	MATERIAL		LINE SIDE			LOAD SIDE		
				Insulator	Conn.	Threaded Stud Size	Openings Per Pole	Connector Configuration	Wire Range AWG/kcmil	Openings Per Pole	Connector Configuration
133X272	CH	1/2/3	510	Plastic	AL	3/8-16 x 1 3/16"	1		#4 - #14 AWG**	12	
133X273	CH	1/2/3	510	Plastic	AL	M10 x 30	1		#4 - #14 AWG**	12	
133X280	CH	1/2/3	510	Plastic	AL	3/8-16 x 1 3/16"	1		#2 - #14 AWG***	8	
133X281	CH	1/2/3	510	Plastic	AL	M10 x 30	1		#2 - #14 AWG***	8	
133X270	CH	1/2/3	510	Plastic	AL	3/8-16 x 1 3/16"	1		2/0 - #14 AWG***	4	
133X271	CH	1/2/3	510	Plastic	AL	M10 x 30	1		2/0 - #14 AWG***	4	

CH = Block is also available with hinge cover attached - include "CH" at end of part number when ordering - See page 55 for available covers

See pages 52-54 for dimensional information