

Class R Fuse Holders - 600 Volt

Specifications:

- Have Been Tested & Approved for 200,000 Amp Withstand Rating
- Patented Cool-Clip® Design
- UL Listed File No. IZLT.E35113
- CSA Certified File No. LR21455
- CE

30 & 60 Amp:

- Clip, Copper Alloy, Tin Plated, with Patented Reject Member

100 Amp:

- Clip, Copper Alloy, Tin Plated, with Reject Pin

200 Amp:

- Clip, One Piece Aluminum, Tin Plated, with Reject Pin

400 & 600 Amp:

- Clip, Copper Alloy, Tin Plated, with Reject Pin



Catalog #:

Std.	Reinforced	Poles	Amp	Base Materials	Wire Range	Fuse Size	Fuses					
6R30A1S 6R30A2S 6R30A3S	SAME	1 2 3	30	Phenolic	#10-#22 AWG CU	13/16" DIA BY 5"	A6D-R A6K-R DLS-R FLSR FLSR_ID FRS-R IDSR KLSR KTS-R LLSRK LLSRK_ID LPS-RK TRS-R					
6R30A1SP 6R30A2SP 6R30A3SP		1 2 3			#10-#14 AWG CU							
6R30A1B 6R30A2B 6R30A3B		1 2 3			#6-#14 AWG CU							
6R60A1B 6R60A2B 6R60A3B		1 2 3			60			Phenolic	#2-#14 AWG CU #2-#12 AWG AL	1 1/16" DIA BY 5 1/2"		
6R100A1B 6R100A2B 6R100A3B		1 2 3							100	Phenolic	#2/0-#14 AWG CU #2/0-#12 AWG AL	1 11/32" DIA BY 7 7/8"
6R200A1BE 6R200A3BE		1 3									200	Polyester
6R400A1B 6R400A3B		1 3			400			Phenolic				
6R600A1B 6R600A3B		1 3							600	Phenolic	(2) 500 kcmil - #4 AWG CU AL	3 7/16" DIA BY 13 3/8"
		N/A										

Contact Factory for Stud Options - see pages 15-17 for dimensional information
See page 37 for available covers

Class H, K and R Fuse Holder Dimensions

		Figure	A	B	C	D	E	F	G	H	I	J	K	L
F30A	1 POLE	SEE FIGURE #1												
RF30A	2 POLE													
R30A	3 POLE													
F60A	1 POLE	FIG 2	4.83	1.48	2.01	1.24	1.8	.50	.49	1.33	N/A	N/A	.218 DIA THRU .40 DIA X .63 C'BORE	.11
RF60A	2 POLE			2.86										
R60A	3 POLE			4.23										
RF100A	1 POLE	FIG 2	6.12	1.93	2.44	2.37	1.87	.62	.61	1.56	N/A	N/A	.28 DIA THRU .53 DIA X .59 C'BORE	.36
R100A	2 POLE			3.49										
	3 POLE			5.05										
F200A	1 POLE	FIG 4	7.13	3.00	3.01	3.00	2.06	2.00	.50	8.00	N/A	N/A	.28 DIA THRU .63 DIA X .38 C'BORE	.26
R200A	3 POLE			9.00										
RF400A	1 POLE	FIG 5	11.5	3.5	3.31	4.00	3.75	2.25 9.25	.62	N/A	N/A	5/16 HEX	.28 DIA THRU .56 DIA X .44 C'BORE	.19
R400A	3 POLE			10.5										
F600A	1 POLE	FIG 5	14.00	4.5	4.31	5.00	4.50	3.00 11.00	.75	N/A	N/A	3/8 HEX	.28 DIA THRU .56 DIA X .44 C'BORE	.19
R600A	3 POLE			12.5										
6F30A	1 POLE	FIG 3	6.25	1.63	1.69	3.13	1.56	.31	.62	.51	N/A	.34	.28 DIA THRU .50 DIA X .44 C'BORE	.25
R6F30A	2 POLE			2.94										
6R30A	3 POLE			4.25										
6F60A	1 POLE	FIG 3	6.75	1.95	2.12	3.12	1.81	N/A	.62	.66	N/A	1.56 3.12	.28 DIA THRU .50 DIA X .50 C'BORE	.33
R6F60A	2 POLE			3.51										
6R60A	3 POLE			5.08										
R6F100A	1 POLE	FIG 3	8.12	2.1	2.60	4.26	1.94	N/A	.87	.61	N/A	1.81 3.62	.28 DIA THRU .59 DIA X .64 C'BORE	.23
R6F100A	2 POLE			3.91										
6R100A	3 POLE			5.73										
6F200A	1 POLE	FIG 4	9.63	3.00	3.01	3.00	3.31	2.00	.5	8.00	N/A	N/A	.33 DIA THRU .73 DIA X .44 C'BORE	.26
6R200A	3 POLE			9.00										
R6F400A	1 POLE	FIG 5	14.50	3.50	3.31	7.00	3.75	2.25 9.25	.62	N/A	N/A	5/16 HEX	.28 DIA THRU .56 DIA X .44 C'BORE	.19
6R400A	3 POLE			10.50										
6F600A	1 POLE	FIG 5	17.0	4.50	4.31	8.00	4.50	3.00 11.00	.75	N/A	N/A	3/8 HEX	.28 DIA THRU .56 DIA X .44 C'BORE	.19
6R600A	3 POLE			12.50										

MM = Dim X 25.4

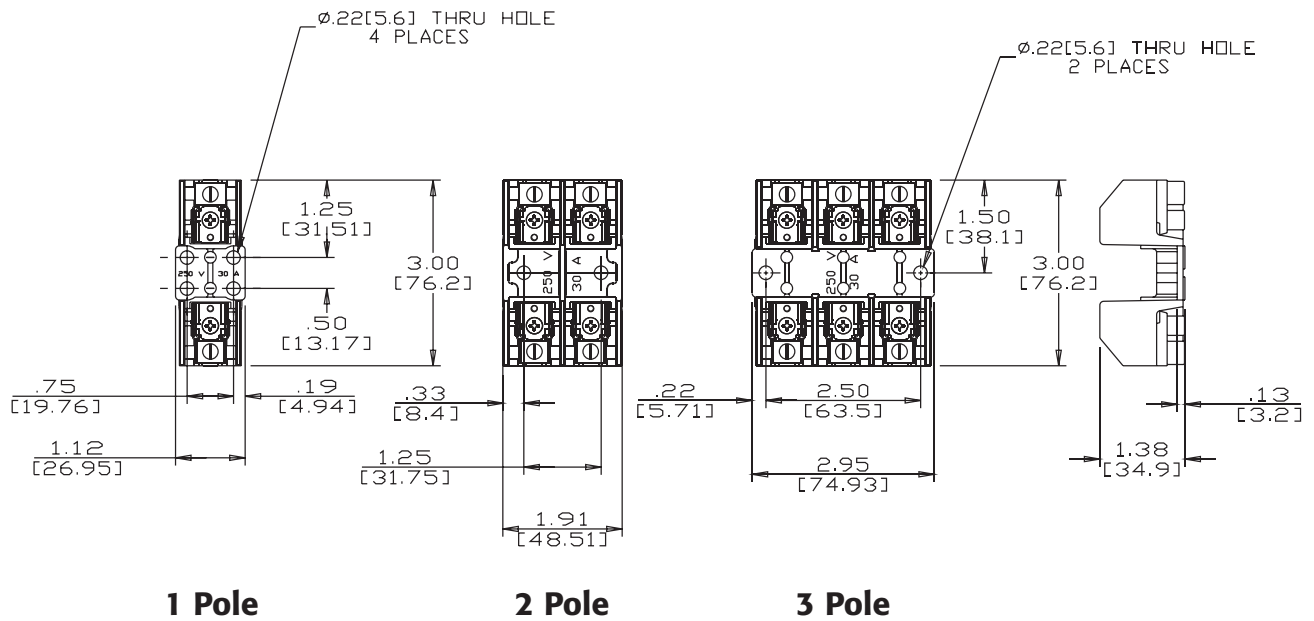


Figure 1:

Class H, K and R Fuse Holder Dimensions

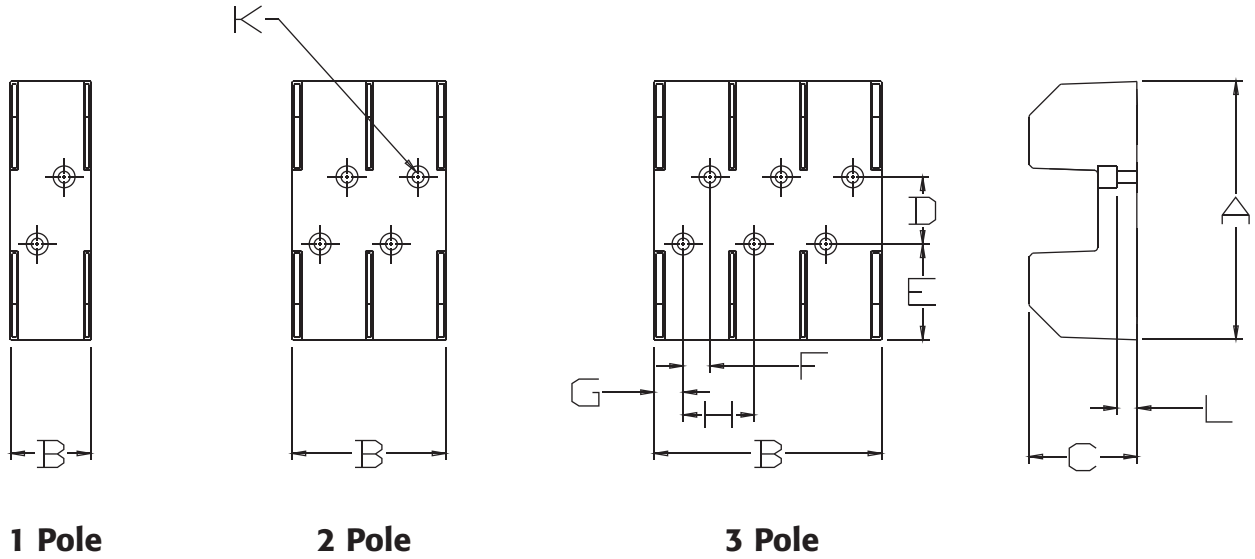


Figure 2:

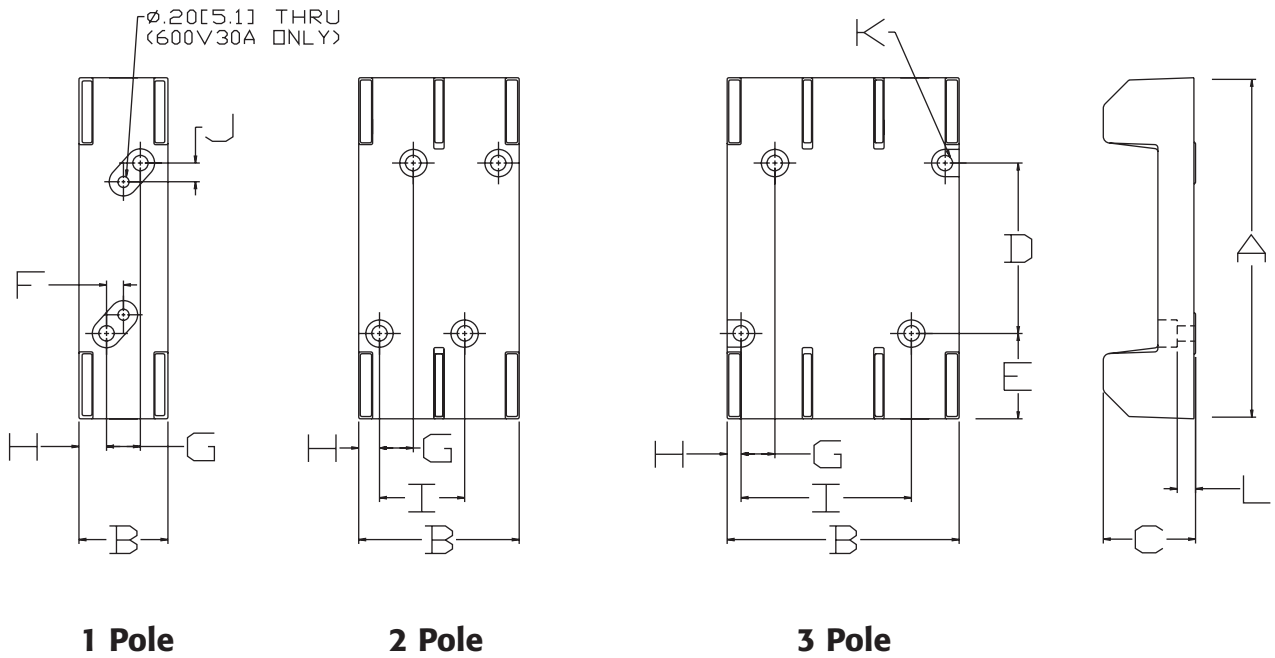


Figure 3:

Class H, K and R Fuse Holder Dimensions

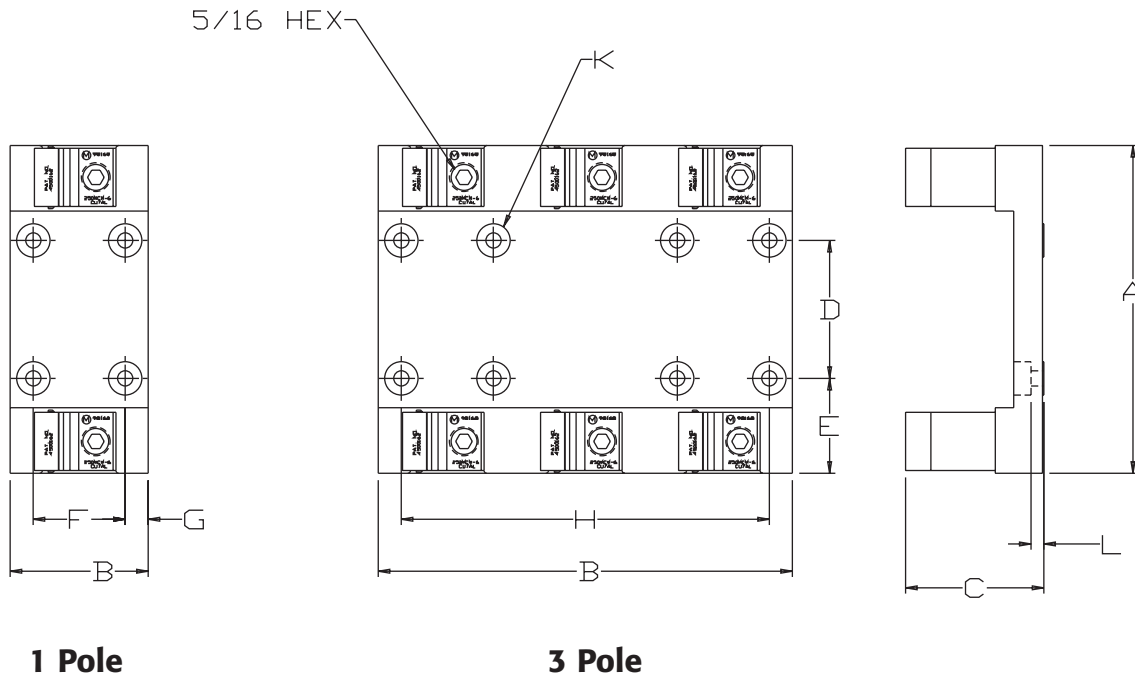


Figure 4:

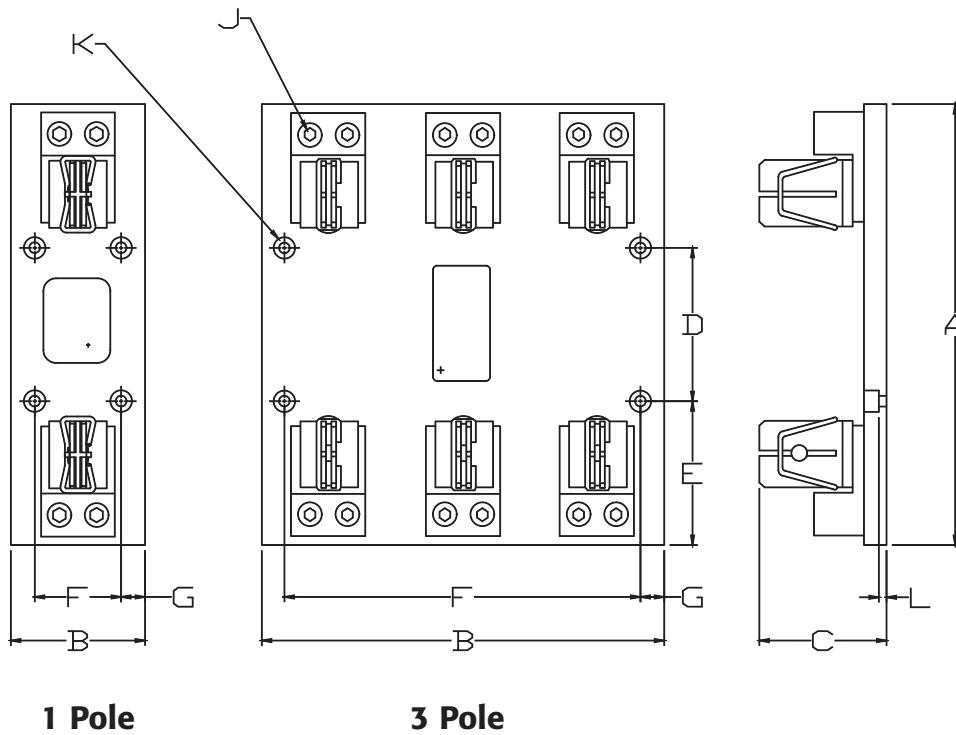


Figure 5: