

# Studded Power Feed Thru Terminal Blocks

## ST722S Series (slide-in mount)


### Specifications:

#### Electrical:

- 300 Volts AC/DC (UL 1059 Class B and C)
- 175 Amps
- Wire Range 2/0 - #8
- Accommodates Two Hole Compression Lugs on .625" Centers – wires #2 and larger may require narrow lugs

#### General/Mechanical:

- Base, Thermoplastic, 125°C (UL RTI)
- Studs, Brass, Nickel Plated
- 1 - 4 Poles
- .73" Centers
- Application Torque: 35 lbf-in for #10 - 32 and M5.  
50 lbf-in for 1/4" - 20 and M6
- UL Recognized File No. XCFR2.E62806
- CSA Certified File No. LR19766
- CE
- RoHS Compliant

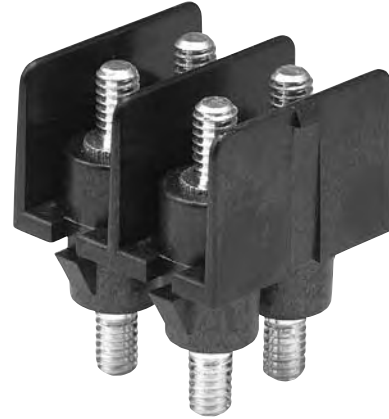

ST722S2502

Catalog Number	Number of Poles	Dimensions A	
		Inches	Metric
ST722SXX01	1	0.82	(20.83)
ST722SXX02	2	1.55	(39.37)
ST722SXX03	3	2.28	(57.91)
ST722SXX04	4	3.01	(76.45)

Replace XX with thread size: 19 - #10-32 Stud  
25 - 1/4" - 20 Stud  
M5 - M5 Stud  
M6 - M6 Stud

See page 57 for available covers

