




MOTORTRONICS™

Solid State AC Motor Controls



Current **TRANSFORMERS**

600V Non-Ansi Rated Window Type

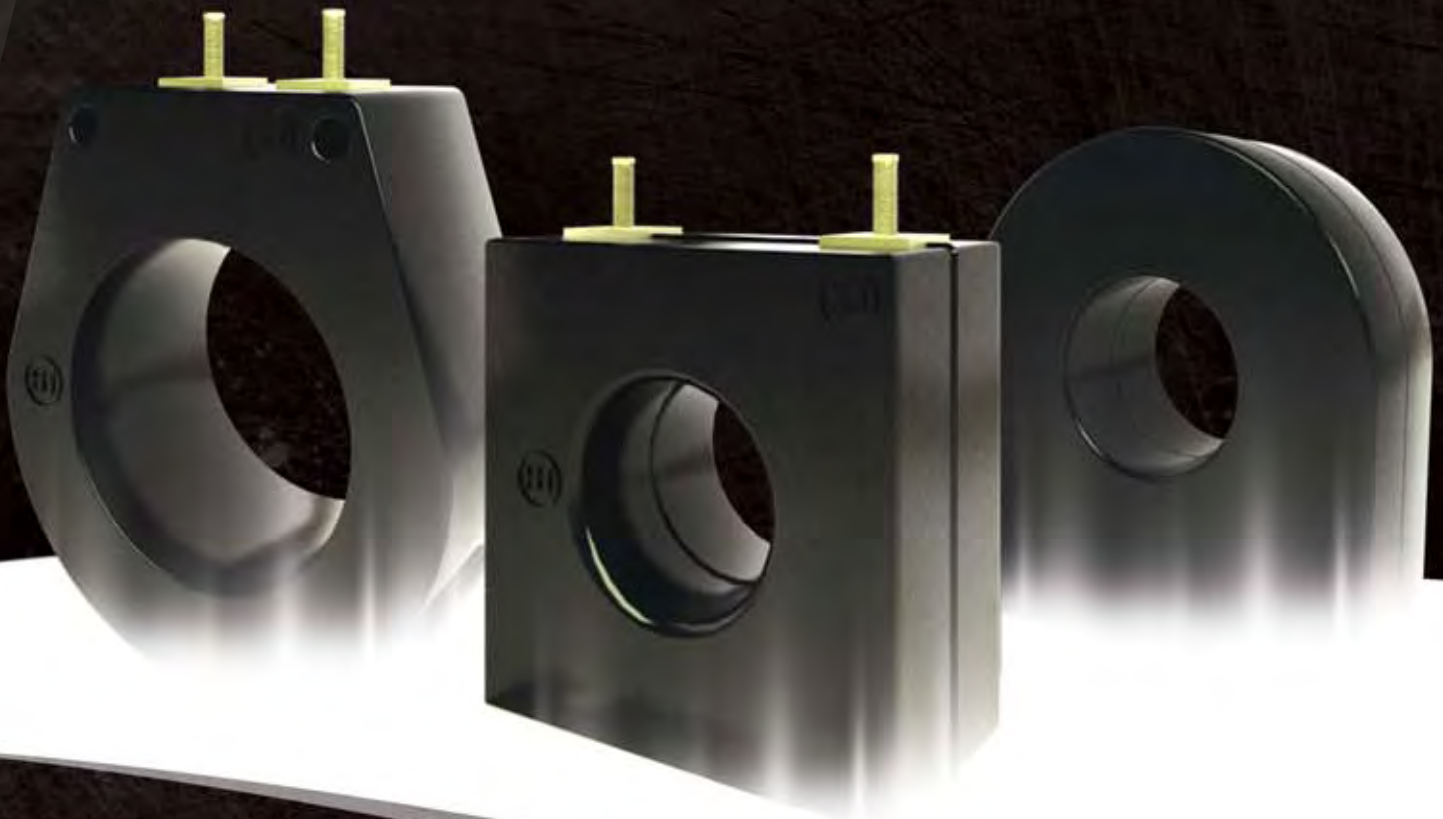

Features:

- Voltage: 600V Non-Ansi Rated Window Type
- Application: Ammeters, wattmeters, and cross current compensation.
- Frequency: 50 - 400 Hz
- Insulation Level: 600 Volts, 10 kV BIL full wave

Current TRANSFORMERS

600V Current Transformers Non-ANSI Rated Window Type

Frequency: 50 - 400 Hz

Insulation Level: 600 Volts, 10 kV BIL full wave

MODEL 13 (PCB)	Window Sizes 0.56"		13	Current Ratio Range: 1000:1
MODEL 14, 15, 16	Window Sizes 0.56" 0.94" 1.25"		14,15,16 SFT	Current Ratio Range: 200:5 ~ 2000:5
MODEL 1A & 1B	Window Sizes 0.64"		1A 1B	Current Ratio Range: 50:5 ~ 250:5
MODEL 2	Window Sizes 1.00" 1.05" 1.13"		2FT	Current Ratio Range: 50:5 ~ 400:5
			2SHT	
			2RL 2DL	
MODEL 5	Window Sizes 1.56"		5SFT	Current Ratio Range: 50:5 ~ 1200:5
			5SHT	
			5RL	
MODEL 5 DRL	Window Sizes 1.56"		5DRL	Current Ratio Range: 50:5 ~ 1200:5
MODEL 56	Window Sizes 2.06"		56 SFT	Current Ratio Range: 50:5 ~ 1200:5
			56 RL	
MODEL 6	Window Sizes 2.06"		6 SFT	Current Ratio Range: 100:5 ~ 1500:5
			6 SHT	
			6 RL	
MODEL 63A,63B,63C	Window Sizes 0.56" 1.25" 2.00"		63A RT	Current Ratio Range: 50:5 ~ 600:5
			63B RT	
			63C RT	
MODEL 7	Window Sizes 2.05"		7 SFT	Current Ratio Range: 100:5 ~ 1600:5
			7 SHT	
			7 RL	
MODEL 76	Window Sizes 3.00"		76 SFT	Current Ratio Range: 200:5 ~ 2000:5
			76 RL	



CORPORATE HEADQUARTERS

P/N: CT-NA-600V102209