

Class CC Enclosed Fuse Holders - 600 Volt

Specifications:

- Tested and Approved for 200,000 RMS Symmetrical Amps Withstand Rating and Short Circuit Current Ratings (SCCR)
- Touchsafe Design IEC Type IP20
- DIN Rail Mount (35mm)
- Blown Fuse Indication Available
- Handle Allows Quick Easy Fuse Change
- Indication light AC and DC - 80 Volts Min.
- UL Listed File No. IZLT2.E35113
- CSA Certified File No. LR21455
- **CE**
- RoHS Compliant




6SC30A1-B shown with fuse (fuse not included)

6SC30A1-B

6SC30A3I-B

Catalog #	Indicating	Poles (X)	Amps	Base Materials	Wire Range	Fuse Size	Fuses
6SC30A1-B	No	1	30	Thermoplastic	#6-#14 AWG CU	13/32" DIA BY 1 1/2"	ATDR
6SC30A2-B		2					ATMR
6SC30A3-B		3					ATQR
6SC30A4-B		4					CCMR
6SC30A1I-B	Yes	1					FRQ-R
6SC30A2I-B		2					KLDR
6SC30A3I-B		3					KLKR
6SC30A4I-B		4					KTK-R, LP-CC

Dimensions	mm	Inches
A	17.8	0.70
B	35.6	1.40
C	53.3	2.10
D	71.1	2.80
E	43.2	1.70
F	59.7	2.35
G	12.2	0.48
H	77.2	3.04

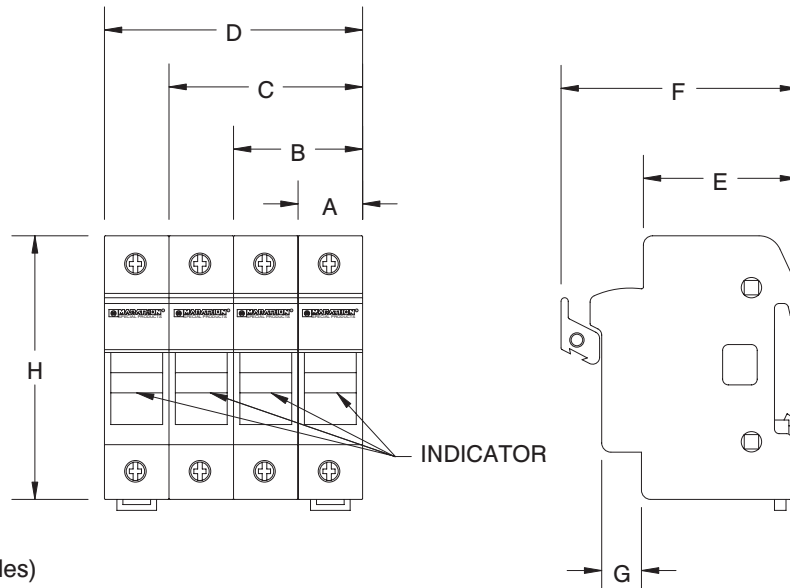

Pin Kit (used for ganging multiple poles)

Catalog Description:
EFH-MCCK

- *Includes 10 handle pins and 20 body clips
- *Use one handle pin and two body clips per pole